Rec'd PCT/PTO 13 JUL 2004

501,443

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number
WO 03/065680 A1

(51) International Patent Classification[7]: H04L 29/06, 12/56, 12/28, 12/64

(21) International Application Number: PCT/EP03/00993

(22) International Filing Date: 31 January 2003 (31.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/352,548 31 January 2002 (31.01.2002) US

(71) Applicant *(for all designated States except US)*: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; S-126 25 Stokholm (SE).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **OYAMA, Johnson** [JP/JP]; 1-11-51-103, Kamirenjaku, Mitaka-shi, Tokyo 181-0012 (JP). **OLSSON, Magnus** [SE/SE]; Småbjörksvägen 47, S-63 42 Spånga (SE).

(74) Agent: **TONSCHEIDT, Andreas**; Ericsson Eurolab Deutschland GmbH, Ericsson Allee 1, 52134 Herzogenrath (DE).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) **Title:** METHOD FOR PROVIDING MULTIPLE SDP MEDIA FLOWS IN A SINGLE POP CONTEXT

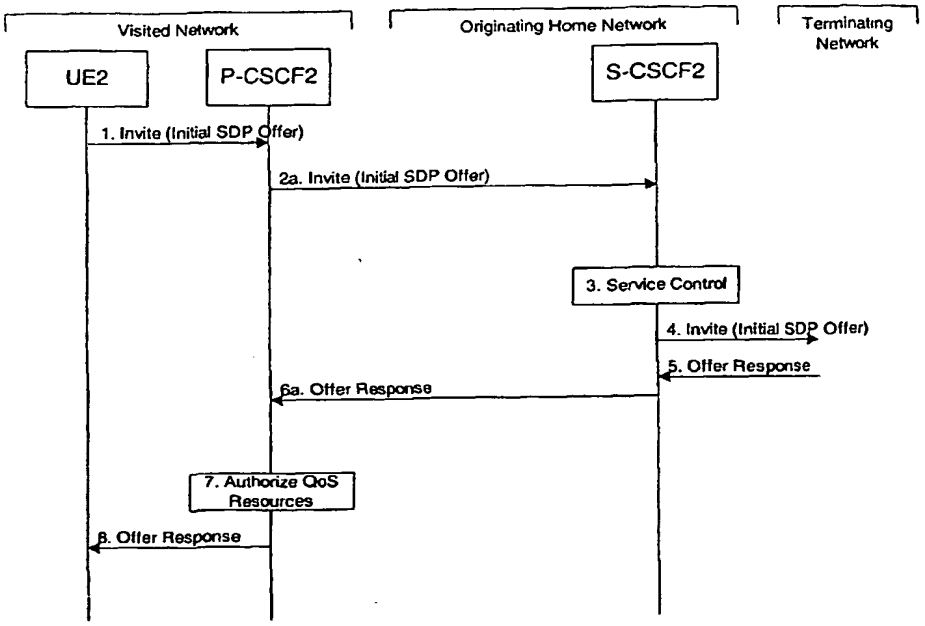

(57) **Abstract**: The invention relates to a method enabling multiple session description protocol media flows for one packet data protocol context. Therefore an indicator is sent from a P-CSCF to a user equipment indicating that a particular session description protocol media flow can be combined with further session description protocol media flows in a single packet data protocol context.

WO 03/065680 A1

BEST AVAILABLE COPY